

# Activeden XML Template

*ARTUR BAJAK*

*artibaj*

---

# Info

**Flash version: CS5**

**ActionScript version: 3.0**

This template site is an Flash (AS3) fully XML driven website template that allows you to modify the whole content without even opening the source files.

It's very easy to manage.

Please read following manual to see how you can manage the content of your website by simple XML file.

---

# Editing XML

To edit text, path to graphic file and other options open file "site.xml".

## WARNING !!!

**01.** The text which you can change will be below displayed in the green color.  
You should not change the others text. The possible change will cause the problem with the reading of the value from the xml file.

**02.** Don't delete `<![CDATA[ ]]>` tags. Text which is placed in `CDATA` tag can format using HTML tag.

```
<![CDATA[<b>Lorem ipsum dolor sit amet.</b>]]>
```

You can use only this HTML tag. This tags are supported by Flash Player.

```
<font>, <b>, <i>, <u>, <span>, <p>, <br>, <li>, <img>, <a>, <textformat>
```

**03.** If you want use special letters (typical to your language, example for polish ę,ś,ć etc) file "site.xml" must be saved as UTF-8 format. To edit that file you can use notepad for windows or Notepad ++. This is free program and you can download from this site

<http://notepad-plus.sourceforge.net/uk/site.htm>

Default i use characters only for English alphabet. If you want use letters typical for your language contact me and i correct file.

**You can also create XML file from scratch**

---

# Settings

Settings of site.

```
<settings>
  <scroll_alpha_Y>false</scroll_alpha_Y>
  <ease_slider_Y>true</ease_slider_Y>
  <buttons_use_hand_cursor>true</buttons_use_hand_cursor>
</settings>
```

- **Scrolling with the transparency effect**

If the content is hidden, the edges of content are transparent. To enable/disable effects edit tag:

`<scroll_alpha_Y>` (scrolling vertical)

value true or false

- **Moving sliders with the ease effect**

If user drag slider and move it, slider will be move with delay (value true) or slider will be move without delay (value false). To enable/disable effects edit tag:

`<ease_slider_Y>` (vertical sliders)

- **Use hand cursor over buttons**

This option enable/disable hand cursor when user move cursor over buttons (menu buttons, scroll buttons, sliders and scales, thumbs etc.). To enable/disable option edit tag:

`<buttons_use_hand_cursor>`

value true or false

---

# Context Menu

Right-Click menu. You can set text to context menu.

```
<context_menu>  
  <info>Copyright © artibaj.com</info>  
</context_menu>
```

- **Info**  
<info></info>

Info about author of page.

When user click on right mouse button will be shown a menu



---

# Background music

Music playing in background.

```
<background_music>  
  <url>music/wm_follow_me.mp3</url>  
  <volume>30</volume>  
</background_music>
```

- **Path to file**

`<url></url>`

Path to audio file.

- **Volume**

`<volume></volume>`

Volume of music (value 0-100).

---

# Logo

Logo of site

```
<logo>  
  <image_url>logo/logo.png</image_url>  
</logo>
```

- **Path to image file**  
<image\_url></image\_url>

---

# Widgets

Buttons to social website.

```
<widgets>
  <widget>
    <tooltip><![CDATA[Facebook]]></tooltip>
    <address_url>http://www.facebook.com</address_url>
    <icon_url>widgets/facebook.png</icon_url>
  </widget>
  <widget>
    <tooltip><![CDATA[Twitter]]></tooltip>
    <address_url>http://www.twitter.com</address_url>
    <icon_url>widgets/twitter.png</icon_url>
  </widget>
</widgets>
```

## **Edit widget**

- **Tooltip text**

`<tooltip></tooltip>`

Tooltip that will be show when user move mouse over on icon.

- **Address url**

`<address_url></address_url>`

Address url to website in full form `http://www. sitename.com`

- **Icon path**

`<icon_url></icon_url>`

Path to image.

Size of image:

Width – 16px

Height – 16px

## **Add new widget**

To add new widget copy and paste `<widget>` tag and change values in tags inside

## **Delete widget**

To delete widget select and delete `<widget>` tag

---

# Banner

Banner with images. You can add as many images as you want.

```
<banner>
  <settings>
    <time>5</time>
    <repeat>true</repeat>
  </settings>
  <items>
    <item>
      <big_image_url>banner/background_01.jpg</big_image_url>
    </item>
    <item>
      <big_image_url>banner/background_02.jpg</big_image_url>
    </item>
    <item>
      <big_image_url>banner/background_03.jpg</big_image_url>
    </item>
  </items>
</banner>
```

## Settings

- **Time to change image**

`<time></time>`

Time after the picture will be changed.

- **Automatic repeat**

`<repeat></repeat>`

If all the images from the banner will be shown, will be automatically displayed once again (value true) or not (value false). If you set value to false, user will have click on play button to display images once again

## Edit images

`<items></items>`

- **Path to image**

`<big_image_url></big_image_url>`

## Add new image

To add new image copy and paste `<item>` tag and change values in tags inside

## Delete image

To delete widget select and delete `< item>` tag

---

## Pages

<page> tag contains main button with page content or if you add subbuttons, then subbuttons with subpages contents. You can add max 7 pages (main buttons).

XML structure for <page> tag

```
<page>
  <button>
    <name><![CDATA[main button name]]></name>
  </button>

  <subpages>
    <!-- add <subpage> tag here -->
  </subpages>
</page>
```

## **Main button**

`<button></button>`

```
<button>
  <name><![CDATA[main button name]]></name>
</button>
```

- **Name of main button**

`<name></name>`

## **Add page (main buton)**

To add page (main button) copy and paste `<page>` tag

## **Delete page (main buton)**

To delete page (main button) select and delete `<page>` tag

---

## Subpage

`<subpage></subpage >`

`<subpage>` tag contains subbutton, page layout type and subpage content. You can add max 8 subbuttons.

XML structure for `<subpage>` tag

```
<subpage type="two_equal_sections">
  <button>
    <name><![CDATA[subbutton name]]></name>
  </button>

  <!-- add <section> tag here -->
</subpage>
```

## **Subbutton**

`<button></button>`

```
<button>
  <name><![CDATA[subbutton name]]></name>
</button>
```

- **Name of subbutton**

`<name></name>`

Subbuttons will be displayed when number of subbuttons will be 2 or more.

## **Add subpage (subbutton)**

To add subpage (subbutton) copy and paste `<subpage>` tag

## **Delete subpage (subbutton)**

To delete subpage (subbutton) select and delete `<subpage>` tag

---

## Page layout type

```
<subpage type="type_name"></subpage >
```


As an attribute of the tag `<subpage>` you can set page layout type. You can use 6 type.

Name of layout type you can enter a value of `type` attribute.

## Page layout type


- one section

```
<subpage type="one_section">
```




- two equal sections

```
<subpage type="two_equal_sections">
```




- two sections, left section small

```
<subpage type="two_sections_left_small">
```




- two sections, right section small

```
<subpage type="two_sections_right_small">
```




- two sections, left section small with menu of category list of content on right

```
<subpage type="two_sections_left_menu">
```



- two sections, right section small with menu of category list of content on left

```
<subpage type="two_sections_right_menu">
```



- external link (if you want use button as a link to external site)

```
<subpage type="external_link">
  <button>
    <name><![CDATA[activeden.net]]></name>
  </button>

  <url>http://www.activeden.net</url>
</subpage>
```

If user click on button then will be displayed website in new window.

- **Address url**

```
<url></url>
```

Address url to website in full form <http://www.sitename.com>.

List of modules that you can use as contents of the sections.

XML general structure for `<section>` tag

```
<section type="section_type">
  <settings>
    <!-- section settings -->
  </settings>
  <heading><![CDATA[Heading]]</heading>
  <content>
    <category>
      <name><![CDATA[category name 1]]</name>
      <item>
        <!-- item values -->
      </item>
    </category>
    <category>
      <name><![CDATA[category name 2]]</name>
      <item>
        <!-- item values -->
      </item>
    </category>
  </content>
</section>
```

## **Heading**

`<heading></heading>`

Heading of section.

## **Category**

`<category></category>`

- **Category name**  
`<name></name>`

Value of `<name>` tag is displayed only if layout type set is to "two\_sections\_right\_menu" or "two\_sections\_left\_menu" (then category names are displayed as list in small section) or section type set is to "links\_address\_text", "links\_image", "links\_text", "prices\_image" or "prices\_text".

## **Add new category**

To add new category copy and paste `<category>` tag.

New categories will be displayed only if layout type set is to "two\_sections\_right\_menu" or "two\_sections\_left\_menu" (then category names are displayed as list in small section) or section type set is to "links\_address\_text", "links\_image", "links\_text", "prices\_image" or "prices\_text". In other cases will be displayed values of first category.

## **Delete category**

To delete category select and delete `<category>` tag.

## **Only one category**

If you use section type "links\_address\_text", "links\_image", "links\_text", "prices\_image" or "prices\_text" with only one category and don't want display category name set category name as empty value and set value of `<space_title_items>` tag in settings on 0.

## **Add new item**

To add new item (depending on the section it will be block with image and text, gallery image or link etc.) copy and paste `<item>` tag.

## **Delete item**

To delete item select and delete `<item>` tag.

## Text

`<section type="text">`

This section consists of text. You can also add images using html tag `<img>`.

```
<section type="text">
  <heading><![CDATA[TEXT]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <text><![CDATA[<p align="justify">Lorem ipsum dolor sit
          amet consectetur adipisicing elit, sed do eiusmod tempor
          incididunt ut labore et dolore magna aliqua. Ut enim ad
          minim veniam, quis nostrud exercitation ullamco laboris
          nisi ut aliquip ex ea commodo consequat.</p>]]></text>
      </item>
    </category>
  </content>
</section>
```

## **Text**

`<text></text>`

Text of content

## Title with text

```
<section type=" title_text">
```

This section consists of list with title and below text. On top is title with background rectangle. Below title is text .You can set align and background color of title.

```
<section type="title_text">
  <settings>
    <space_between_elements>5</space_between_elements>
    <space_between_items>20</space_between_items>
    <background_corner_radius>0</background_corner_radius>
  </settings>
  <heading><![CDATA[TITLE TEXT]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <title align="left" background_color="0xB30000">
          <![CDATA[<font color="#ffffff"><b>12.09.2011</b></font>]]>
        </title>
        <text><![CDATA[<p align="justify">Lorem ipsum dolor sit
          amet,consectetur adipiscingsequat.</p>]]></text>
        </item>
        <item>
          <title align="left" background_color="0xB30000">
            <![CDATA[<font color="#ffffff"><b>04.06.2011</b></font>]]>
          </title>
          <text><![CDATA[<p align="justify">Sed ut perspiciatis unde
            omnis iste natus error sit voluptatem accusantium
            doloremque laudant.</p>]]></text>
          </item>
        </category>
      </content>
    </section>
```

## **Settings**

`<settings></settings>`

Settings with spaces.

- **Space between title and text**  
`<space_between_elements></space_between_elements>`
- **Space between each item**  
`<space_between_items></space_between_items>`
- **Corner radius of title background**  
`<background_corner_radius></background_corner_radius>`

## **Item**

`<item></item>`

- **Title align**  
`<title align="right"...`  
  
Align of title (value: right, center, left)
- **Title background color**  
`<title background_color ="0xFFFFF" ...`
- **Title**  
`<title></title>`
- **Text**  
`<text></text>`

## News calendar

```
<section type="news_calendar">
```

This section consists of list of news as card from the calendar. On left is card of calendar with date and on right is text of news.

```
<section type="news_calendar">
  <settings>
    <space_between_elements>20</space_between_elements>
    <space_between_items>20</space_between_items>
  </settings>
  <heading><![CDATA[NEWS CALENDAR]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item background_color="0x9F0000">
        <day><![CDATA[20]]></day>
        <month><![CDATA[05]]></month>
        <text><![CDATA[<p align="justify">Lorem ipsum dolor sit
          amet,consectetur adipiscing consequat</p>]]></text>
      </item >
      <item background_color="0xA80000">
        <day><![CDATA[15]]></day>
        <month><![CDATA[04]]></month>
        <text><![CDATA[<p align="justify"></u>Sed ut
          perspiciatis unde omnis isteantium, t eos qui ratione
          voluptatem sequi nesciunt.</p>]]></text>
      </item>
      <item background_color="0xB30000">
        <day><![CDATA[10]]></day>
        <month><![CDATA[03]]></month>
        <text><![CDATA[<p align="justify">Neque porro quisquam
          est, qui dolorem ipsum quolore magnam.</p>]]></text>
      </item>
    </category>
  </content>
</section>
```

## **Settings**

`<settings></settings>`

Settings with spaces.

- **Space between card of calendar and text of news**  
`<space_between_elements></space_between_elements>`
- **Space between news**  
`<space_between_items></space_between_items>`

## **Item**

`<item></item>`

- **Day of news**  
`<day></day>`
- **Month of news**  
`<month></month>`
- **Text**  
`<text></text>`

## Image and below text

<section type=" image\_text">

This section consists of blocks with image and below image text.

```
<section type="image_text">
  <settings>
    <space_between_elements>10</space_between_elements>
    <space_between_items>20</space_between_items>
  </settings>
  <heading><![CDATA[TEXT BELOW IMAGE]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <thumb_url width="800" height="120">
          images/image_01.jpg</thumb_url>
        <text><![CDATA[<p align="justify">Sed ut perspiciatis
          unde omnis iste natus error sit voluptatem
          accusur.</p>]]></text>
      </item>
      <item>
        <thumb_url width="800" height="160">
          images/image_02.jpg</thumb_url>
        <text><![CDATA[<p align="justify"><b>Lorem ipsum
          dolor sit amet</b>, consectetur adipiscing elit, sed
          do eiusmod tempor incididunt ut labore et dolore
          magna alt.</p>]]></text>
      </item>
    </category>
  </content>
</section>
```

## Settings

`<settings></settings>`

Settings with spaces.

- **Space between image and text**  
`<space_between_elements></space_between_elements>`
- **Space between each item**  
`<space_between_items></space_between_items>`

## Item

`<item></item>`

- **Path to image**  
`<thumb_url>< thumb_url>`
- **Image width**  
`<thumb_url width="800"...`

If layout type set is on :

- "one\_section" then max width of image must be 800px,
- "two\_equal\_sections" then max width must be 380px,
- "two\_sections\_left\_menu" or "two\_sections\_right\_menu" max width must be 570px
- "two\_sections\_left\_small" or "two\_sections\_right\_small" if image is in small section max width must be 180px, if is in bigger section max width must be 570px

If image is in popup window then max width must be equal width of popup window

- **Image height**  
`...height="120">`
- **Text**  
`<text></text>`

## Image on left, text on right

<section type=" image\_left\_text\_right">

This section consists of blocks with image on left and text on right.

```
<section type="image_left_text_right">
  <settings>
    <space_between_elements>10</space_between_elements>
    <space_between_items>20</space_between_items>
  </settings>
  <heading><![CDATA[IMAGE LEFT TEXT RIGHT]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <thumb_url width="150" height="113">
          images/image_150_01.jpg</thumb_url>
        <text><![CDATA[<p align="justify">Sed ut perspiciatis
          unde omnis iste natus error sit voluptatem accus
          nesciunt.</p>]]></text>
      </item>
      <item>
        <thumb_url width="180" height="135">
          images/image_180_01.jpg</thumb_url>
        <text><![CDATA[<p align="justify">At vero eos et
          accusamus et iusto odio dignissimos ducimus qui
          blanditiis praeseperellendus. </p>]]></text>
      </item>
    </category>
  </content>
</section>
```

## Settings

`<settings></settings>`

Settings with spaces.

- **Space between image and text**  
`<space_between_elements></space_between_elements>`
- **Space between each item**  
`<space_between_items></space_between_items>`

## Item

`<item></item>`

- **Path to image**  
`<thumb_url>< thumb_url>`
- **Image width**  
`<thumb_url width="150"...`

If layout type set is on :

- "one\_section" then max width of image must be 800px,
- "two\_equal\_sections" then max width must be 380px,
- "two\_sections\_left\_menu" or "two\_sections\_right\_menu" max width must be 570px
- "two\_sections\_left\_small" or "two\_sections\_right\_small" if image is in small section max width must be 180px, if is in bigger section max width must be 570px

If image is in popup window then max width must be equal width of popup window

Set image width less than section width.

- **Image height**  
`...height="120">`
- **Text**  
`<text></text>`

## Text on left, image on right

<section type="text\_left\_image\_right">

This section consists of blocks with text on left and image on right.

```
<section type="text_left_image_right">
  <settings>
    <space_between_elements>10</space_between_elements>
    <space_between_items>20</space_between_items>
  </settings>
  <heading><![CDATA[TEXT LEFT IMAGE RIGH]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <thumb_url width="150" height="113">
          images/image_150_01.jpg</thumb_url>
        <text><![CDATA[<p align="justify">Sed ut perspiciatis
          unde omnis iste natus error sit voluptatem aui
          nesciunt.</p>]]></text>
      </item>
      <item>
        <thumb_url width="180" height="135">
          images/image_180_01.jpg</thumb_url>
        <text><![CDATA[<p align="justify">At vero eos et
          accusamus et iustoepellendus. </p>]]></text>
      </item>
    </category>
  </content>
</section>
```

## Settings

`<settings></settings>`

Settings with spaces.

- **Space between image and text**  
`<space_between_elements></space_between_elements>`
- **Space between each item**  
`<space_between_items></space_between_items>`

## Item

`<item></item>`

- **Path to image**  
`<thumb_url>< thumb_url>`
- **Image width**  
`<thumb_url width="150"...`

If layout type set is on :

- "one\_section" then max width of image must be 800px,
- "two\_equal\_sections" then max width must be 380px,
- "two\_sections\_left\_menu" or "two\_sections\_right\_menu" max width must be 570px
- "two\_sections\_left\_small" or "two\_sections\_right\_small" if image is in small section max width must be 180px, if is in bigger section max width must be 570px

If image is in popup window then max width must be equal width of popup window

Set image width less than section width.

- **Image height**  
`...height="120">`
- **Text**  
`<text></text>`

## Image on left, text on right and "read more" button

<section type="image\_left\_text\_right\_read\_more">

This section consists of blocks with image on left, text on right and below text "read more" button (with button align right).

```
<section type="image_left_text_right_read_more">
  <settings>
    <space_between_elements>20</space_between_elements>
    <space_between_items>20</space_between_items>
    <button_text><![CDATA[read more...]]></button_text>
  </settings>
  <heading><![CDATA[READ MORE]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <thumb_url width="150" height="113">
          images/image_150_01.jpg</thumb_url>
        <text><![CDATA[<p align="justify">Nam libero tempore,
          cum soluta nobis est eligendi optio cumque nihil
          impedit quo ribus asperiores repellat.</p>]]></text>
        <url>readmore1</url>
      </item>
      <item>
        <thumb_url width="180" height="135">
          images/image_180_01.jpg</thumb_url>
        <text><![CDATA[<p align="justify">At vero eos et
          accusamus et iusto odio dignissimos ducimus qui
          blanditiis praest mollit anim id est laborum.</p>]]>
        </text>
        <url>readmore2</url>
      </item>
    </category>
  </content>
</section>
```

## Settings

`<settings></settings>`

Settings with spaces.

- **Space between image and text**  
`<space_between_elements></space_between_elements>`
- **Space between each item**  
`<space_between_items></space_between_items>`
- **Text on "read more" button**  
`<button_text></button_text>`

## Item

`<item></item>`

- **Path to image**  
`<thumb_url>< thumb_url>`
- **Image width**  
`<thumb_url width="150"...`

If layout type set is on :

- "one\_section" then max width of image must be 800px,
- "two\_equal\_sections" then max width must be 380px,
- "two\_sections\_left\_menu" or "two\_sections\_right\_menu" max width must be 570px
- "two\_sections\_left\_small" or "two\_sections\_right\_small" if image is in small section max width must be 180px, if is in bigger section max width must be 570px

If image is in popup window then max width must be equal width of popup window

Set image width less than section width.

- **Image height**  
`...height="120">`
- **Text**  
`<text></text>`
- **Link**  
`<link></link>`

Name of link. You can put link to popup window or website address.

- To add link to popup window put name of popup window

### **HOW TO ADD POPUP WINDOW CLICK HERE**

- To add link to website put url address in full form <http://www.sitename.com>

## Links with text

```
<section type="links_text">
```

This section consists of categories with a list of links. Each category consists of title and list of links. Each link consists of name of link.

```
<section type="links_text">
  <settings>
    <space_title_margin>0</space_title_margin>
    <space_title_items>0</space_title_items>
    <space_items_margin>30</space_items_margin>
    <space_between_items_X>10</space_between_items_X>
    <space_between_items_Y>30</space_between_items_Y>
    <space_between_categories>50</space_between_categories>
    <columns_number>2</columns_number>
  </settings>
  <heading><![CDATA[LINKS TEXT]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <title><![CDATA[Sunt in culpa qui officia deserunt
mollit anim id nt in culpa qui officia mollit a]]></title>
        <url>http://www.actedden.net</url>
      </item>
      <item>
        <title><![CDATA[Dolor in reprehenderit in voluptate
velit esse]]></title>
        <url>http://www.actedden.net</url>
      </item>
    </category>
  </content>
</section>
```

## **Settings**

`<settings></settings>`

Settings with spaces.

- **Title margin**  
`<space_title_margin></space_title_margin>`
- **Space between title and list of links**  
`<space_title_items></space_title_items>`
- **List of links margin**  
`<space_items_margin></space_items_margin>`
- **Horizontal space between links**  
`<space_between_items_X></space_between_items_X>`
- **Vertical space between links**  
`<space_between_items_Y></space_between_items_Y>`
- **Space between categories**  
`<space_between_categories></space_between_categories>`
- **Columns amount**  
`<columns_amount></columns_amount>`

## **Item**

`<item></item>`

- **Name of site (link title)**  
`<title></title>`
- **URL address**  
`<url></url>`

Url address to website

## Links with address of website and text

```
<section type="links_address_text">
```

This section consists of categories with a list of links. Each category consists of title and list of links. Each link consists of name and address of website and address url.

```
<section type="links_address_text">
  <settings>
    <space_title_margin>0</space_title_margin>
    <space_title_items>30</space_title_items>
    <space_items_margin>30</space_items_margin>
    <space_between_items_X>10</space_between_items_X>
    <space_between_items_Y>30</space_between_items_Y>
    <space_between_categories>50</space_between_categories>
    <columns_number>2</columns_number>
  </settings>
  <heading><![CDATA[LINKS ADDRESS]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <title><![CDATA[Sunt in c deserunt mollit a]]></title>
        <text_url><![CDATA[<i>http://www.activeden.net</i>]]>
        </text_url>
        <url>http://www.activeden.net</url>
      </item>
      <item>
        <title><![CDATA[Dolo in voluptate velit esse]]></title>
        <text_url><![CDATA[<i>http://www.activeden.net</i>]]>
        </text_url>
        <url>http://www.activeden.net</url>
      </item>
    </category>
  </content>
</section>
```

## **Settings**

`<settings></settings>`

Settings with spaces.

- **Title margin**  
`<space_title_margin></space_title_margin>`
- **Space between title and list of links**  
`<space_title_items></space_title_items>`
- **List of links margin**  
`<space_items_margin></space_items_margin>`
- **Horizontal space between links**  
`<space_between_items_X></space_between_items_X>`
- **Vertical space between links**  
`<space_between_items_Y></space_between_items_Y>`
- **Space between categories**  
`<space_between_categories></space_between_categories>`
- **Columns amount**  
`<columns_amount></columns_amount>`

## **Item**

`<item></item>`

- **Name of site (link title)**  
`<title></title>`
- **Address of site**  
`<text_url></text_url>`
- **URL address**  
`<url></url>`

Url address to website

## Links with image

```
<section type="links_image">
```

This section consists of categories with a list of links. Each category consists of title and list of links. Each link consists of name of site and image. As link you can use images in format .jpg, .png and flash movie .swf.

```
<section type="links_image">
    <settings>
        <space_title_margin>0</space_title_margin>
        <space_title_items>0</space_title_items>
        <space_between_items_Y>30</space_between_items_Y>
        <space_between_categories>50</space_between_categories>
    </settings>
    <heading><![CDATA[LINKS IMAGE]]></heading>
    <content>
        <category>
            <name><![CDATA[category name]]></name>
            <item>
                <title><![CDATA[Sunt in culpa qui]]></title>
                <thumb_url width="800" height="120">images/image_01.jpg
                </thumb_url>
                <url>http://www.activeden.net</url>
            </item>
            <item>
                <title><![CDATA[Dolor in reprehenderit in voluptate
esse]]></title>
                <thumb_url width="800" height="160">images/image_02.jpg
                </thumb_url>
                <url>http://www.activeden.net</url>
            </item>
        </category>
    </content>
</section>
```

## Settings

`<settings></settings>`

Settings with spaces.

- **Title margin**  
`<space_title_margin></space_title_margin>`
- **Space between title and list of links**  
`<space_title_items></space_title_items>`
- **Vertical space between links**  
`<space_between_items_Y></space_between_items_Y>`
- **Space between categories**  
`<space_between_categories></space_between_categories>`

## Item

`<item></item>`

- **Name of site (link title)**  
`<title></title>`
- **Path to image**  
`<thumb_url></thumb_url>`
- **Image width**  
`<thumb_url width="800"...`

If layout type set is on :

- "one\_section" then max width of image must be 800px,
- "two\_equal\_sections" then max width must be 380px,
- "two\_sections\_left\_menu" or "two\_sections\_right\_menu" max width must be 570px
- "two\_sections\_left\_small" or "two\_sections\_right\_small" if image is in small section max width must be 180px, if is in bigger section max width must be 570px

If image is in popup window then max width must be equal width of popup window

- **Image height**  
`...height="120">`
- **URL address**  
`<url></url>`

Url address to website

## Image gallery

```
<section type="gallery">
```

This section consists list with images thumbs. If user click on thumb will be display full view with title and description of image. If you want you can omit the title and description.

```
<section type="gallery">
  <settings>
    <slideshow_time>5</slideshow_time>
    <columns_number>4</columns_number>
  </settings>
  <heading><![CDATA[GALLERY]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <big_image_url>images/image_01.jpg</big_image_url>
        <thumb_url>images/thumb_01.jpg</thumb_url>
        <title_thumb><![CDATA[Sed ut perspiciatis]]>
        </title_thumb>
        <title><![CDATA[Sed ut perspiciatis]]></title>
        <text><![CDATA[Lorem ipsum dolor sit amet,
        consectetur adipisicing eagna aliqua.]]></text>
      </item>
      <item>
        <big_image_url>images/image_02.jpg</big_image_url>
        <thumb_url>images/thumb_02.jpg</thumb_url>
        <title_thumb><![CDATA[Lorem ipsum dolor]]>
        </title_thumb>
        <title><![CDATA[]]></title>
        <text><![CDATA[]]></text>
      </item>
    </category>
  </content>
</section>
```

## Settings

`<settings></settings>`

- **Time to change image**

`<slideshow_time> </slideshow_time>`

Time to change image in slideshow mode (in seconds)

- **Column amount**

`<columns_amount> </columns_amount>`

This option is only for popup window. Column amount of images thumbs.

## Item

`<item></item>`

- **Path to big image**

`<big_image_url></big_image_url>`

Image size any

- **Path to thumb**

`<thumb_url></thumb_url>`

Thumb sizes:

Width - 175 px

Height - 125 px

- **Thumb title**

`<title_thumb></title_thumb>`

- **Image title in full view mode**

`<title></title>`

If you want you can omit the title. Set to empty value.

- **Description of image in full view mode**

`<text></text >`

If you want you can omit the description. Set to empty value.

## Video gallery

<section type="video">

This section consists list with images thumbs. If user click on thumb will be display player with movie.

Player options:

- supports format .flv, .mp4 and youtube.
- supports HD videos from youtube or your server (then you must create videos with different quality).
- thumb and title from youtube or your own
- you can set video buffer time (in seconds)
- auto repeat
- video starting volume
- suggested quality
- you can add your own logo
- context menu to change display mode, play/pause video, mute/unmute, show/hide info
- press space to play/pause video
- button link to play video from youtube website



```

<logo>
  <thumb_url width="100" height="50">video/logo.png</thumb_url>
  <space_right>10</space_right>
  <space_top>10</space_top>
</logo>

</settings>

<heading><![CDATA[]]></heading>

<content>

  <category>

    <name><![CDATA[]]></name>

    <item>
      <quality>
        <q_240p></q_240p>
        <q_360p></q_360p>
        <q_480p></q_480p>
        <q_720p></q_720p>
        <q_1080p></q_1080p>
      </quality>
      <video_id>7Vd0NYkKFmQ</video_id>
      <thumb_url></thumb_url>
      <title><![CDATA[]]></title>
      <text><![CDATA[]]></text>
    </item>
    <item>
      <quality>
        <q_240p></q_240p>
        <q_360p>video/01.flv</q_360p>
        <q_480p></q_480p>
        <q_720p></q_720p>
        <q_1080p></q_1080p>
      </quality>
      <video_id></video_id>
      <thumb_url>video/thumb_01.jpg</thumb_url>
      <title><![CDATA[Video nr 1]]></title>
      <text><![CDATA[Video Description]]></text>
    </item>

  </category>

</content>

</section>

```

## Settings

`<settings></settings>`

- **Buffer time**

`<buffer_time></buffer_time>`

Specifies how long to buffer messages before starting to display movie. For example, to make sure that the first 15 seconds of the movie play without interruption, set buffer time to 15; the application begins playing the movie only after 15 seconds of data are buffered.

- **Suggested quality**

`<suggested_quality></suggested_quality>`

Sets the suggested video quality in which videos are played. Parameter value can be: "240p", "360p", "480p", "720p", "1080p".

- **Default state of repeat**

`<repeat_default></repeat_default>`

Default state of video repeat. Parameter value can be: "no" (no repeat), "one" (repeat actual played video) or "all" (repeat all videos from category)

- **Default value of volume**

`<volume_default></volume_default>`

Default value of video volume. Parameter value can be numbers from the interval 0-100

- **Column amount**

`<columns_amount> </columns_amount>`

This option is only for popup window. Column amount of thumbs.

- **Player infos**

`<player_info></player_info>`

Player info displayed in top left corner on screen when user change repeat state and volume of movie.

- **Repeat all**

`<repeat_all></repeat_all>`

- **Repeat one**

`<repeat_one></repeat_one>`

- **Repeat all**

<no\_repeat></no\_repeat>

- **Volume**  
<volume></volume>

- **Titles in context menu**  
<context\_menu></context\_menu>

Titles in context menu.

#### Attention

The following names are not allowed (regardless of the language), but the words may be used in conjunction with other words to form a custom names (for example, although "Paste" is not allowed, "Paste tastes great" is allowed): Save, Zoom, In, Zoom, Out, 100%, Show, All, Quality, Play, Loop, Rewind, Forward, Back, Movie not loaded, About, Print, Show Redraw Regions, Debugger, Undo, Cut, Copy, Paste, Delete, Select, All, Open, Open in new window, Copy link.

- **Play Video**  
<play></play >
- **Pause Video**  
<pause></pause>
- **Full-Screen mode**  
<fullscreen\_mode></fullscreen\_mode>
- **Normal mode**  
<normal\_mode></normal\_mode>
- **Mute Video**  
<mute></mute>
- **Unmute Video**  
<unmute></unmute>
- **Show info**  
<show\_info></show\_info>
- **Hide info**  
<hide\_info></hide\_info>
- **No repeat**  
<no\_repeat></no\_repeat>

- **Repeat one**  
<repeat\_one></repeat\_one>
- **Repeat all**  
<repeat\_all></repeat\_all>
- **Youtube player info**  
<youtube></youtube>

Youtube player info displayed on screen or in thumb.

- **Info about loading youtube interface**  
<loading\_info></loading\_info>
- **Invalid video id**  
<invalid\_id\_info></invalid\_id\_info>
- **Invalid video id info in thumb**  
<invalid\_id\_thumb\_info></invalid\_id\_thumb\_info>

If you put invalid video id and don't set title of thumb (title will be loading from youtube) then as title of thumb will be displayed this info and as thumb icon "no file".

- **No video file info in thumb**  
<no\_file\_thumb\_info ></no\_file\_thumb\_info>

If video is no longer available (author or service youtube delete it) and you don't set title of thumb (title will be loading from youtube) then as title of thumb will be displayed this info and as thumb icon "no file".

- **Not allowed play video in embedded players**  
<not\_allowed\_embedded\_info ></not\_allowed\_embedded\_info >

Some authors not allowed played movies on other website. If you add this video to your gallery user show info about this and link to youtube. When user click on link, then will be displayed on new browser window with movie.

- **Logo**  
<logo></logo>

You can add your own image as logo. Logo will be displayed on top right corner.

- **Path to image**  
<thumb\_url></ thumb\_url>

- **Image width**  
<thumb\_url width="100"...
- **Image height**  
...height="50">
- **Space between logo and right edge**  
<space\_right></space\_right>
- **Space between logo and top edge**  
<space\_top></space\_top>

## **Item**

<item></item>

- **Path to local video file**  
<quality></quality>

If you add local video file, you can create videos with different quality. Set path to file in appropriate tags (<q\_240p>, <q\_360p>, <q\_480p>, <q\_720p>, <q\_1080p>).

- **Path to youtube video**  
<video\_id></video\_id>

Set video id of youtube video. You can get video id from url path. Video ID is 11-character string after "?v="

[http://www.youtube.com/watch?v=FArZxLj6DLk&feature=player\\_embedded#!](http://www.youtube.com/watch?v=FArZxLj6DLk&feature=player_embedded#!)

Video id is [FArZxLj6DLk](#).

If you add path to video in <quality> tag and <video\_id> then will be played movie from <video\_id>. This tag have priority.

- **Path to thumb**  
<thumb\_url></thumb\_url>

Thumb sizes:

Width - 175 px

Height - 125 px

If you use youtube video you can use thumb from youtube then set empty value. You can also use your own thumb.

- **Title**  
`<title></title>`

Title of thumb and movie in player. If you use youtube video you can use youtube title, then set empty value to `<title>` tag.

- **Description of video**  
`<text></text >`

If you want you can omit the description. Set to empty value.

## Prices with text

```
<section type="prices_text">
```

This section consists of categories with a list of prices. Each category consists of title and list of prices. Each item consists of name and price. Between name and price automatically is inserted dots.

```
<section type="prices_text">
  <settings>
    <space_title_margin>0</space_title_margin>
    <space_title_items>30</space_title_items>
    <space_items_margin>30</space_items_margin>
    <space_between_items_X>10</space_between_items_X>
    <space_between_items_Y>30</space_between_items_Y>
    <space_between_categories>50</space_between_categories>
    <columns_number>2</columns_number>
  </settings>
  <heading><![CDATA[PRICES TEXT]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <title><![CDATA[Sunt in culpa qui]]></title>
        <price><![CDATA[10,50 $]]></price>
      </item>
      <item>
        <title><![CDATA[Dolor in reprehenderit in esse]]></title>
        <price><![CDATA[45,50 $]]></price>
      </item>
      <item>
        <title><![CDATA[Do eiusmod tempormagna aliqua]]></title>
        <price><![CDATA[99,50 $]]></price>
      </item>
    </category>
  </content>
</section>
```

## **Settings**

`<settings></settings>`

Settings with spaces.

- **Title margin**  
`<space_title_margin></space_title_margin>`
- **Space between title and list of links**  
`<space_title_items></space_title_items>`
- **List of prices margin**  
`<space_items_margin></space_items_margin>`
- **Horizontal space between links**  
`<space_between_items_X></space_between_items_X>`
- **Vertical space between links**  
`<space_between_items_Y></space_between_items_Y>`
- **Space between categories**  
`<space_between_categories></space_between_categories>`
- **Column amount**  
`<columns_amount> </columns_amount>`

## **Item**

`<item></item>`

- **Name of item**  
`<title></title>`
- **Price**  
`<price></price>`

## Prices with images

```
<section type="prices_image">
```

This section consists of categories with a list of prices with images. Each category consists of title and list of prices. Each item consists of image, name and price.

```
<section type="prices_image">
  <settings>
    <space_title_margin>0</space_title_margin>
    <space_title_items>0</space_title_items>
    <space_between_items_Y>40</space_between_items_Y>
    <space_between_categories>20</space_between_categories>
    <columns_number>1</columns_number>
  </settings>
  <heading><![CDATA[PRICES IMAGE]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <item>
        <title><![CDATA[Sunt in culpa qui]]></title>
        <price><![CDATA[10,50 $]]></price>
        <thumb_url>images/restaurant/pizza/thumb_01.jpg</thumb_url>
      </item>
      <item>
        <title><![CDATA[Dolor in reprehenderit in voluptate esse]]>
        </title>
        <price><![CDATA[45,50 $]]></price>
        <thumb_url>images/restaurant/pizza/thumb_02.jpg</thumb_url>
      </item>
      <item>
        <title><![CDATA[Do eiusmod tempormagna aliqua]]></title>
        <price><![CDATA[99,50 $]]></price>
        <thumb_url>images/restaurant/pizza/thumb_03.jpg</thumb_url>
      </item>
    </category>
  </content>
</section>
```

## **Settings**

`<settings></settings>`

Settings with spaces.

- **Title margin**  
`<space_title_margin></space_title_margin>`
- **Space between title and list of prices**  
`<space_title_items></space_title_items>`
- **Vertical space between prices**  
`<space_between_items_Y></space_between_items_Y>`
- **Space between categories**  
`<space_between_categories></space_between_categories>`
- **Column amount**  
`<columns_amount> </columns_amount>`

This option is only for popup window. Column amount of images thumbs.

## **Item**

`<item></item>`

- **Name of item**  
`<title></title>`
- **Price**  
`<price></price>`
- **Path to thumb**  
`<thumb_url></thumb_url>`

Thumb sizes:

Width - 175 px

Height - 125 px

## Contact form

<section type="contact\_form">

This section consists contact form. You can add many subjects and each subject you can assign to a different email address. User can receive a confirmation of sent message. You can set format of sending and confirmation email.

```

<section type="contact_form">
  <heading><![CDATA[Contact Form]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <input_form>
        <titles>
          <name><![CDATA[Enter your name:]]></name>
          <email><![CDATA[Enter your e-mail:]]></email>
          <subject><![CDATA[Choose subject:]]></subject>
          <message><![CDATA[Enter your message:]]></message>
          <confirmation><![CDATA[Send me a copy]]>
          </confirmation>
        </titles>
        <error_messages>
          <name>Please enter your name</name>
          <email>Please enter an valid email address</email>
          <subject>Please select subject</subject>
          <message>Please enter a message</message>
        </error_messages>
        <confirmation_default_selected>true
        </confirmation_default_selected>
        <status_sent_email>
          <default>Please enter information</default>
          <sending_in_progress>Sending...
          </sending_in_progress>
          <send_correct>Your message was sent.</send_correct>
          <send_failed>Unable to send message.</send_failed>
          <full_screen_mode>To enter text exit full-screen
            mode</full_screen_mode>
        </status_sent_email>
        <text_button>
          <button_send><![CDATA[SEND]]></button_send>
          <button_clear><![CDATA[RESET]]></button_clear>
        </text_button>
      </input_form>
    </category>
  </content>
</section>

```

```

<settings>
  <path_to_php_file>send_email.php</path_to_php_file>

  <subjects>
    <subject>
      <name>Lorem ipsum</name>
      <email>lorem@sitename.com</email>
    </subject>
    <subject>
      <name>Dolor sit amet</name>
      <email>lorem@sitename.com</email>
    </subject>
    <subject>
      <name>Consectetur adipisicing elit</name>
      <email>lorem@sitename.com</email>
    </subject>
  </subjects>

  <email_message><![CDATA[Name: &name <br>
  Email: &email <br><br>
  IP: &ip_address <br><br>
  Message: <br><br>
  &message]]>
</email_message>

  <confirmation>
    <name>artibaj</name>
    <subject>[confirmation]</subject>
    <message><![CDATA[
      THIS E-MAIL IS SENT AUTOMATICALLY!<br>
      Hi<br>
      Thank you for your interest in my site. I
      give you answer as soon as possible.<br>
      This is copy of your message:<br><br>
      &copy_message
    ]]></message>
  </confirmation>
</settings>
</category>
</content>
</section>

```

## Content

<content></content>

- **Input form**

<input\_form></input\_form>

- **Titles of text fields**

<titles> </titles>

- **Name title of sender**

<name> </name>

- **Email title of sender**

<email> </email>

- **Subject title of sender**

<subject> </subject>

- **Message title of sender**

<message> </message>

- **Confirmation title**

<confirmation> </confirmation>

- **Error messages**

<error\_messages> </error\_messages>

Error messages of sending email. If user don't fill text fields and will want to send email then will be displayed errors messages.

- **Error message of text field with name**

<name></name>

- **Error message of text field with email address**

<email></email>

- **Error message of text field with subject**

<subject></subject>

- **Error message of text field with message**

<message></message>

- **Confirmation default selected**

<confirmation\_default\_selected></confirmation\_default\_selected>

You can set default state of confirmation of sending email. Values true checkbox is selected, false unselected.

- **Infos about the status of sent email**

`<status_sent_email></status_sent_email>`

- **Default status**

`<default> </default>`

- **Sending in progress**

`<sending_in_progress> </sending_in_progress>`

- **Correct sending email**

`<send_correct> </send_correct>`

- **Failed send email**

`<send_failed> </send_failed>`

- **Full screen mode**

`<full_screen_mode> </full_screen_mode>`

To put text in text fields site can't be in full-screen mode.

- **Text on buttons**

`<text_button> </text_button>`

- **Text on button "send"**

`<button_send> </button_send>`

- **Text on button "clear"**

`<button_clear> </button_clear>`

- **Settings**

`<settings></settings>`

- **Path to php file**

`<path_to_php_file></path_to_php_file>`

Path to php file to send email

- **List of subjects**

`<subjects></subjects>`

- **Subject**  
`<subject></subject>`
  - **Title of subject**  
`<name></name>`
  - **Address email**  
`<email></email>`

Address email on which will be send message with selected subject

- **Add new subject**  
To add new subject select, copy and paste `<subject>` tag
- **Delete subject**  
To delete subject select and delete `<subject>` tag
- **Format of message**  
`<email_message></email_message>`

You can set format of received messages. In message you can display name of sender, his email address, ip address and message. To display name of sender use variable `&name`, email address use variable `&email`, ip address use variable `&ip_address`, message use variable `&message`.

Examples:

If user fill contact form with values

Name: John Lorem Ipsum

Email: loremipsum@name.com

Subject: Shipping

Message: Hi. What's up?

If you set format of message

```
<email_message><![CDATA[&message]]></email_message>
```

You get email with message:

Hi. What's up?

If you set format of message

```
<email_message><![CDATA[Message was send from IP address: &ip_address <br>
<br>
Message: <br><br>
&message]]>
</email_message>
```

You get email with message:

Message was send from IP address: 20.45.1880

Message:

Hi. What's up?

If you set format of message

```
<email_message><![CDATA[Name: &name <br>
Email: &email <br>
IP: &ip_address <br><br>
Message: <br><br>
&message]]>
</email_message>
```

You get email with message:

Name: John Lorem Ipsum  
Email: [loremipsum@name.com](mailto:loremipsum@name.com)  
IP: 20.45.1880

Message:

Hi. What's up?

- **Automatic confirmation of sent email**

```
<confirmation></confirmation>
```

If user check box with automatic confirmation, then he receive email with message which format you set.

- **Name of sender**  
`<name></name>`

Your name as confirmation sender.

- **Subject title**  
<subject></subject>
- **Message**  
<message></message>

You can set format of message. In message you can put your own text and copy of user message. To put copy of user message use &copy\_message variable.

Example:

```
<message><![CDATA[THIS E-MAIL IS SENT AUTOMATICALLY!<br>
    DO NOT REPLY!</FONT><br>
    <br>
    Thank you for your interest in my site. I give you answer as soon as
    possible.<br><br>
    Regards <br>
    artibaj.com<br>
    -----<br>
    This is copy of your message:<br><br>
    &copy_message]]></message>
```

## Google Map

<section type="google\_map">

This section consists google map. You can set you own marker or use default.

```
<section type="google_map">
  <heading><![CDATA[LOCATION]]></heading>
  <content>
    <category>
      <name><![CDATA[category name]]></name>
      <map_key>
ABQIAAAAiea-pLxzj5fgf7Y77Hf82hQeyvCmETaRWa1Qe8WIntWKZ1euhxSBkVYqv
QYXhIw88qYoNsqV__CEfw</map_key>
      <latitude>51.0473078</latitude>
      <longitude>18.4383563</longitude>
      <deafault_zoom>12</deafault_zoom>
      <marker>
        <thumb_url width="50" height="50">google_map/marker.png
        </thumb_url>
        <marker_has_shadow>true</marker_has_shadow>
        <tooltip>
          <title><![CDATA[My address]]></title>
          <content><![CDATA[<b>John Milles.</b> <br>
            0926 Lorem Road. <br>
            New York, E21 356D. <br>
            USA]]></content>
        </tooltip>
      </marker>
    </category>
  </content>
</section>
```

## **Content**

`<content></content>`

- **Map Key**

`<map_key></map_key>`

To use google map you must have map key. To get key use this site

<http://code.google.com/intl/pl/apis/maps/signup.html>

- **Latitude**

`<latitude></latitude>`

Latitude of location.

- **Longitude**

`<longitude></longitude>`

Longitude of location.

To set latitude and longitude you can use this site.

<http://www.gorissen.info/Pierre/maps/googleMapLocationv3.php>

- **Default zoom**

`<deafault_zoom></deafault_zoom>`

Default zoom of map. User can change zoom once the map is displayed.

- **Marker options**

`<marker></marker>`

- **Path to image**

`<thumb_url></thumb_url>`

Path to image with marker. If you want use default marker set empty value.

- **Image width**

`<thumb_url width="50"`

- **Image height**

`height="50">`

- **Marker with shadow**

`<marker_has_shadow></marker_has_shadow>`

Add shadow to marker. Value true or false.

- **Tooltip**

`<tooltip></tooltip>`

If user click on marker then will be displayed tooltip. You can set title and description of tooltip.

- **Title**

`<title></title>`

- **Content**

`<content></content>`

---

# Popup windows

<popup\_pages><popup\_pages>

You can use popup windows. To add popup window, you can add link to text or use section "image\_left\_text\_right\_read\_more" and add link to "read more" button . Then when user click on link will be displayed popup window.

Popup window will be displayed as "one\_section". In popup window you can use the same sections as in pages with one exception "image\_left\_text\_right\_read\_more"

## **CLICK HERE TO SHOW SECTIONS DESCRIPTIONS**

XML structure for popup window

```
<popup name="popup_name" width="500" height="300">
  <!-- add here <section> tag -->
</popup>
```

## **Add new popup window**

To add new popup window copy and paste `<popup>` tag and add unique name of window

## **Name of popup window**

To change name of popup window change value of name attribute in `<popup>` tag. Each name must be unique.

```
<popup name="popup_name" width="800" height="300">
```

## **Width of popup window**

To set width of popup window change value of width attribute in `<popup>` tag

```
<popup name="popup_name" width="800" height="300">
```


## **Height of popup window**

To set height of popup window change value of height attribute in `<popup>` tag

```
<popup name="popup_name" width="800" height="300">
```

## **Size exceptions of popup window**

- 1.) When you use "contact\_form" section, size of window will be set 410x380 regardless of setting width and height in `<popup>` tag.
- 2.) When you use "gallery", "video" or "prices\_image" section, width of window will be set depending on column amount value regardless of setting width in `<popup>` tag.
- 3.) Size you set is a size of visible area in window. Example

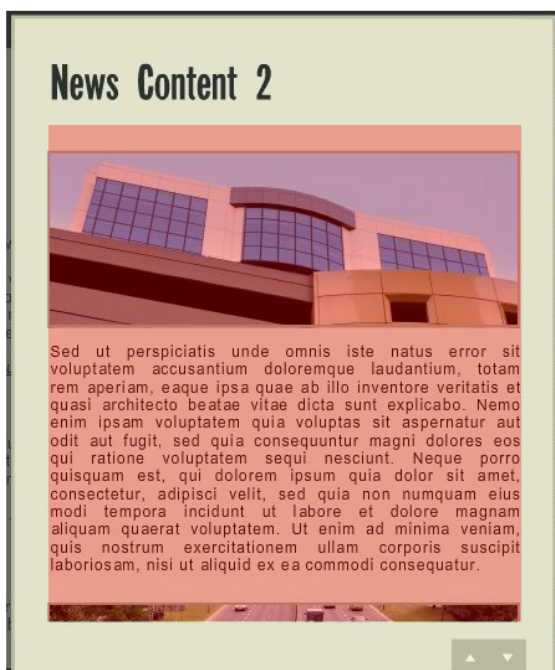

Width and height window is the red area.

## **Create text link to popup window**

To create text link to popup window use

```
<a href='event:popup_news1'>LINK TO POPUP </a>
```

This is similar to html tag. In value of href use `event:popup_` and put name of popup window `news1`

If value of href will be wrong syntax (example it will appeal to the name of the window that is not defined), then when user click on link nothing will happened.

---

## Links to pages

You can add text links to other pages in flash site.

### Example

On first page will be displayed news section. In news will be link text. When user click on link then will be displayed other page in flash ( the same as user will be click on other button in main menu)

To create text link to other page use

```
<a href='event:go_to_page_3_2'>LINK GO TO PAGE 3 SUBPAGE 2</a>
```

This is similar to html tag. In value of href use `event:go_to_page_` and put number of main page (main button) char `"_"` and number of subpage (subbutton)

If value of href will be wrong syntax (example it will appeal to the page that is not defined), then when user click on link nothing will happened.

---

# Ways to edit XML file

To edit xml file you can edit file "site.xml" from folder "site\_flash". This file have defined pages. Or you can edit file from folder "create". This file don't have defined pages and popups windows tags. In "xml tags" folder are files with corresponding tags. To add pages, subpages and section tags just copy content of the files and paste it.

Example

## 1.) Add pages (main buttons).

Open file "page.xml". Copy content of file and paste in "site.xml" between tags `<pages></pages>`. Paste as many times as you want to have the main buttons. Change names of buttons.

```
<page>
  <button>
    <name><![CDATA[HOME]]></name>
  </button>
  <subpages>
    <!-- add here <subpage> tag -->
  </subpages>
</page>
```

## 2.) Add subpages (subbutton) and set layout type

Depending on the layout type of subpage open right file (example if page will be as one section open file "subpage\_one\_section.xml", if as two section open file "subpage\_two\_equal\_section.xml" or if button will be a external link open file "subpage\_external\_link.xml" etc.) then copy and paste content of file between tags `<subpages></subpages>`. Change names of subbutton.

```
<subpage type="one_section">
  <button>
    <name><![CDATA[subbuton name]]></name>
  </button>
  <!-- add here <section> tag -->
</subpage>
```

### 3.) **Add sections**

Depending on the layout type add one or two sections. If you want add section news open file "news\_calendar.xml" , if you want add gallery section open file "gallery.xml" etc., copy and paste content of file between tags `<subpage>` `</subpage>`. Name of xml files match names of sections types.

### 4.) **Add popups windows**

Open file "popup.xml". Copy content of file and paste in between tags `<popup_pages>` `</popup_pages>`. Paste as many times as you want to add the popups windows. Change names, width and height of popup window.

```
<popup name="popup_name" width="500" height="300">  
    <!-- add here <section> tag -->  
</popup>
```

To add sections follow the same steps as in step 3.) just paste content of file between tags `<popup>` `</popup>`

---

# Fonts

If you want to edit .fla file you have must installed this fonts. You can download it from here:

- **Ft4**

<http://www.fontyukle.net/en/ft13.ttf>

- **Ft34**

<http://www.fontyukle.net/en/ft34+Bold.ttf>

---

# Upload to server

Upload to server all files from "site\_flash" folder:

- index.php
- site.swf
- site.xml
- disablescroll.js
- expressInstall.swf
- swfobject.js
- swffit.js
- transform.php
- send\_email.php
- folders with images and audio file

## WARNING !!!

File "site.xml" must be in the same folder what file "site.swf"

---

# Add site to google

Before you add site to google, open file "[index.php](#)" and change values of tags

[description](#) – short description of your site

[keywords](#) – keywords of your site

```
<meta name="description" content=" Your encouraging and adequate to content description of the site">
```

```
<meta name="keywords" content="keyword1, keyword2, keyword3, ketword4">
```

Open site:

<http://www.google.com/addurl/?continue=/addurl>

Fill the all fields and click on the button on the bottom. The site will be added within several days.

---

## File "transform.php"

Script from this file converts text from xml file on html text.  
Google will also indexing text from xml file.

### WARNING !!!

If text from xml file displays under swf file, it means that in xml file are errors in html tags of formatting text. Check the xml file and correct errors.

If you don't want use this file, just delete it from server and in file "index.php" delete this lines

```
<div>
  <!--include the php file-->
  <?php @ require_once ("transform.php"); ?>
  <!--include the php file-->
</div>
```

---

# Errors

## **XML errors**

If you make mistakes in XML syntax example don't close tag

incorrect (tag `<text>` not closed, no `/` sign before text)

```
<text><![CDATA[Lorem ipsum dolor sit amet.]]><text>
```

correct:

```
<text><![CDATA[Lorem ipsum dolor sit amet.]]></text>
```

you will see info about error when you open page. Page will be show only if all xml tags are correct.

## **Files loading errors**

If you set path to image, audio or video file is not on the server, you will see icon "NO FILE".

---

## Mail to me

If there are any more questions that were not answered, please contact me through my email [artibaj@artibaj.com](mailto:artibaj@artibaj.com)